

600x1200mm



#### **APPLICATION**



COMMERCIAL BUILDING



HOTEL & RESTAURANT



GYMNASIUM



HALL & CARRIDOR



AUDDODT



SCHOOL & COLLEGE



INDUSTRY



SPA & WELLNESS CENTRES

These are the most common type of surfaces used for your place.

#### **FEATURES**



HIGH STRENGTH



CHEMICAL RESISTANCE



STAIN RESISTANT



EASY TO CLEAN



EASY MAINTENANCE



DIMENSIONAL STABILITY



SLIP RESISTANT



ECO FRIENDLY



Book Match tiles are created when two marble slabs are placed facing each other, giving the impression of an open book.






# BRECCIA AURORA



**BRECCIA AURORA** 

600X1200 MM



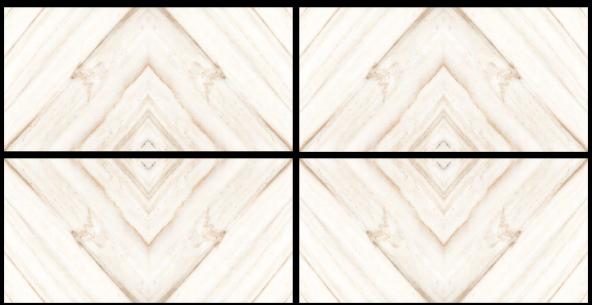


## **CAMRON BEIGE**

SIZE **600X1200 MM** 


FINISH GLOSSY

RANDOM: 2

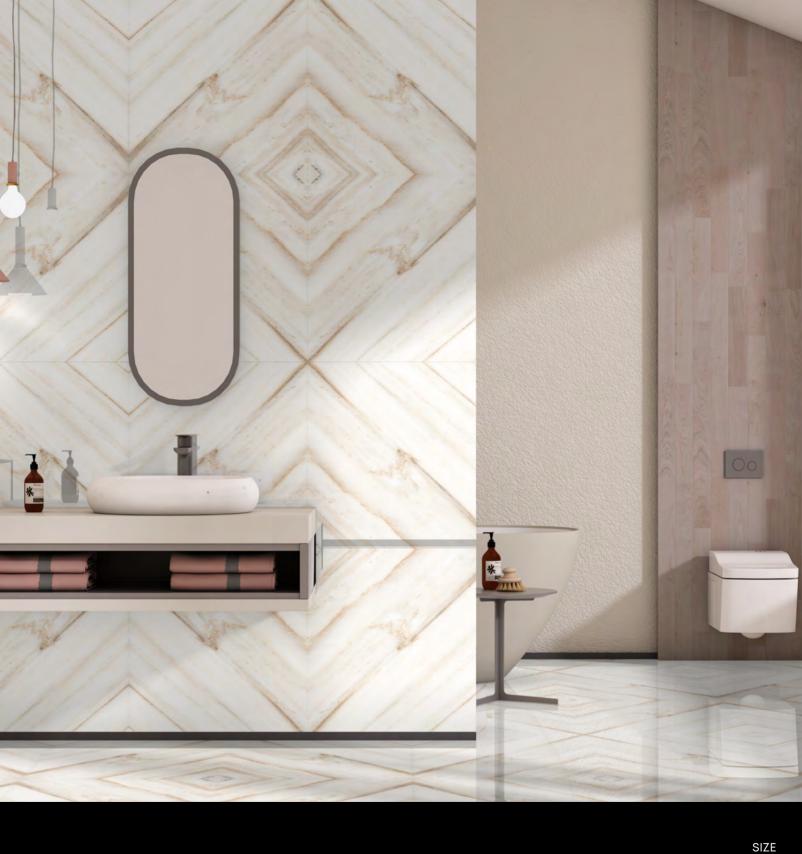

600X1200 MM



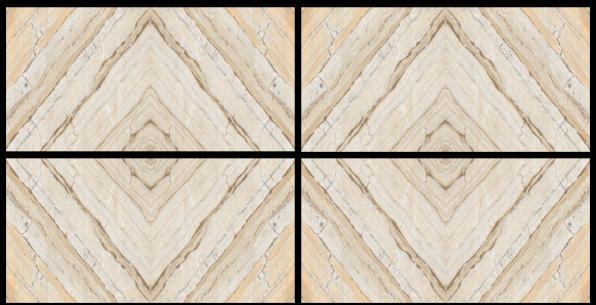



## FORTUNE BEIGE




**FORTUNE BEIGE** 

600X1200 MM

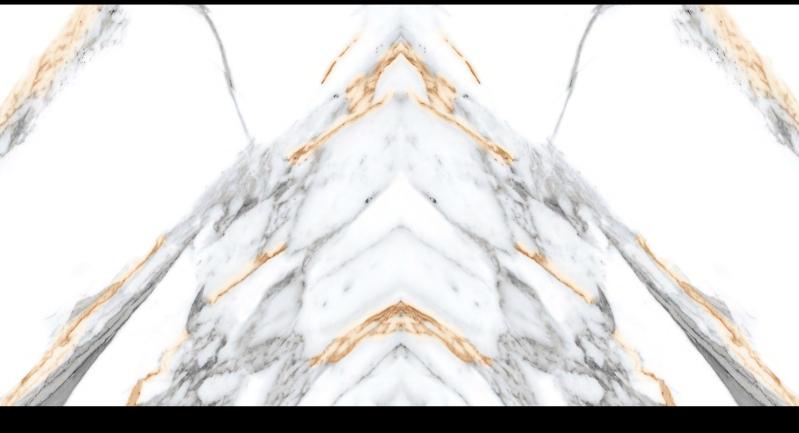

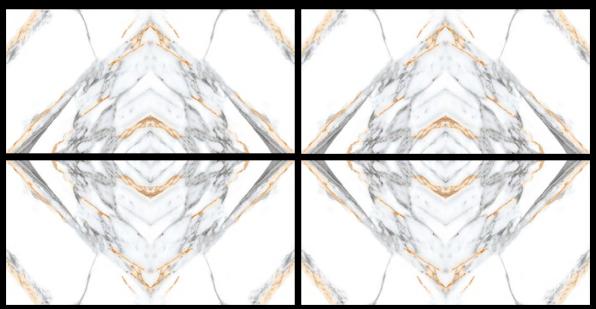


## **KEROS WHITE**

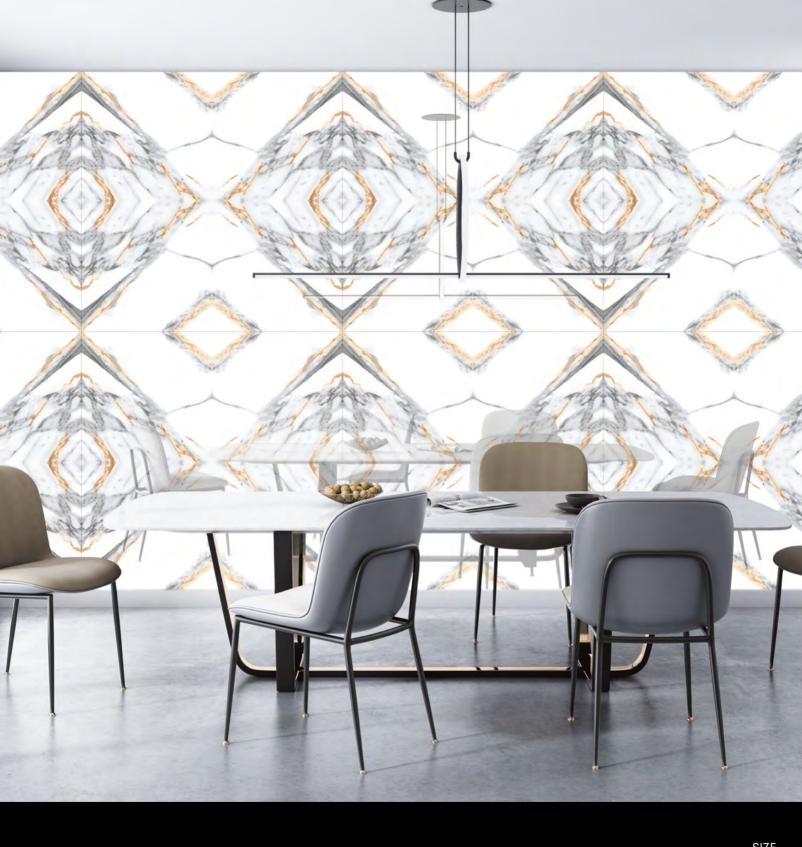

31/2

600X1200 MM



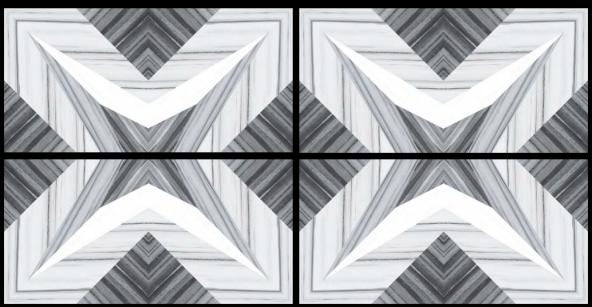


### **MARVERIC GREY**




**MARVERIC GREY** 

600X1200 MM



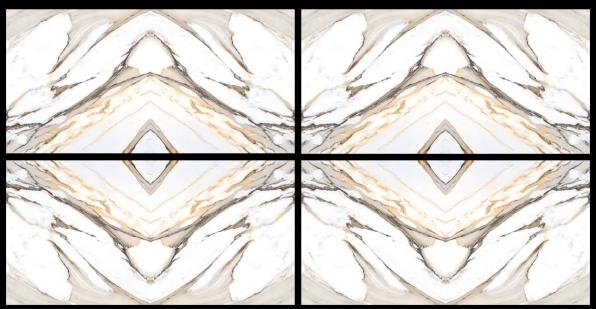

## **MAXIMUS STATUARIO**

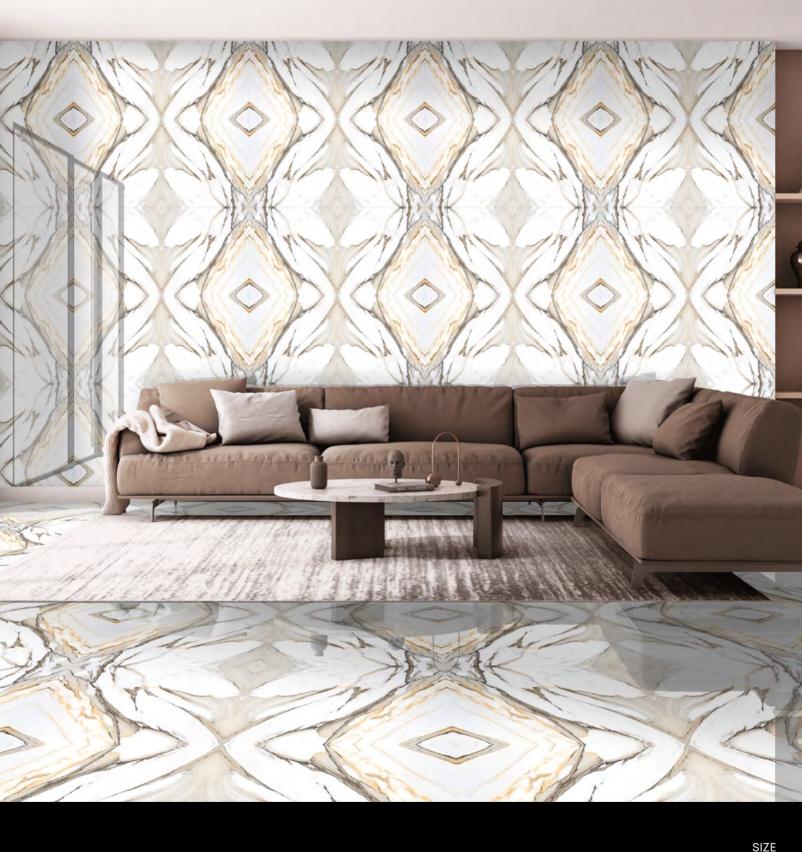


**MAXIMUS STATUARIO** 

600X1200 MM

FINISH

**GLOSSY** 



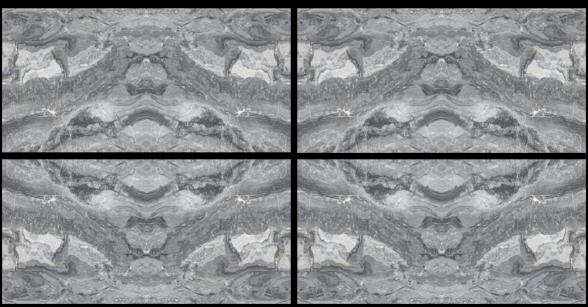


## MELIBEA GREY



**MELIBEA GREY** 

600X1200 MM



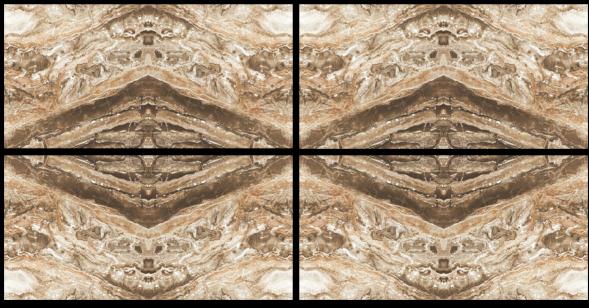



## NATURAL EMPIRE



**NATURAL EMPIRE** 

600X1200 MM

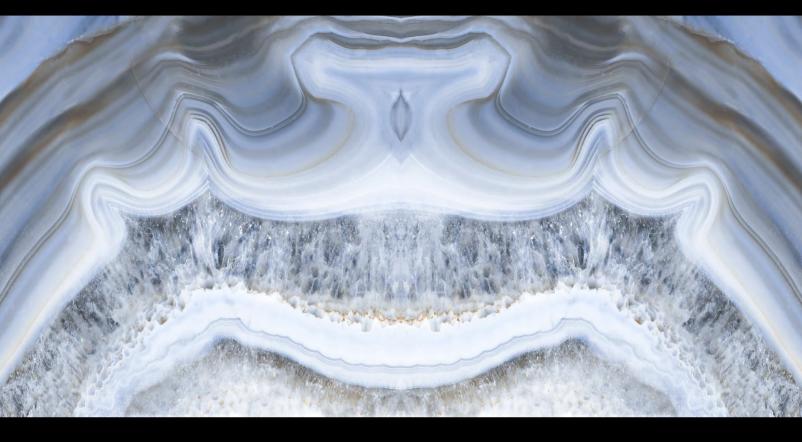

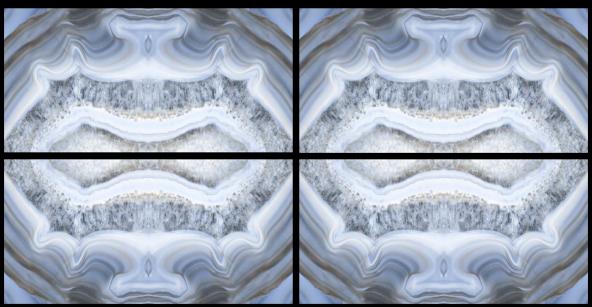


### **ONYX ICE**



**ONYX ICE** 

600X1200 MM



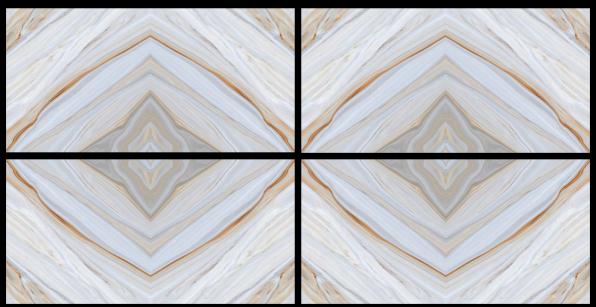

#### **ONYX JADE**

SIZE **600X1200 MM** 

FINISH GLOSSY

RANDOM: 2




600X1200 MM


FINISH GLOSSY

**ONYX JADE** 



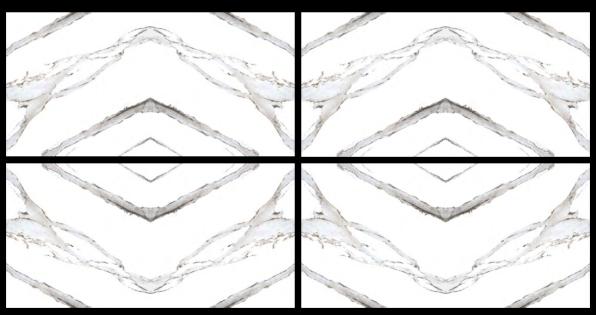


## **ORGEN WHITE**

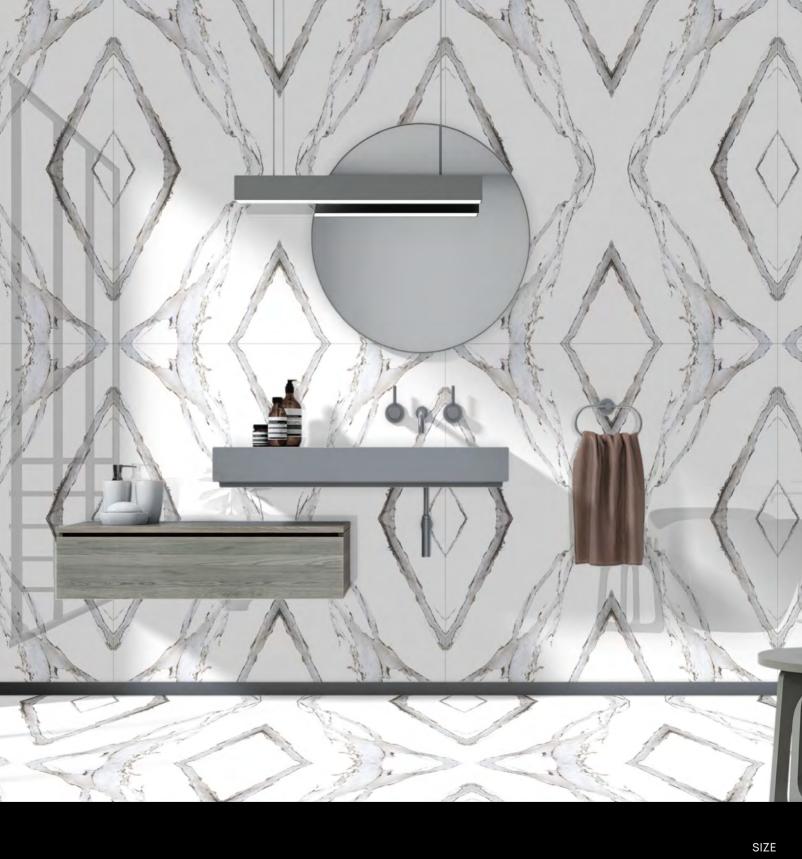

600X1200 MM



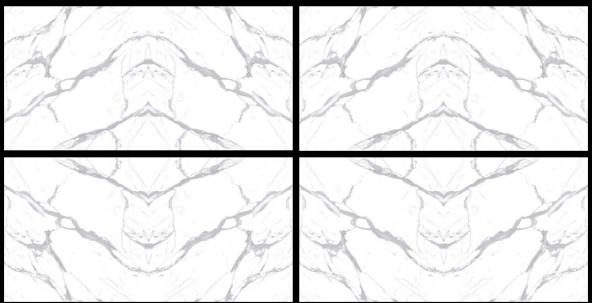


## **REGAL STATUARIO CLASSIC**



**REGAL STATUARIO CLASSIC** 

600X1200 MM



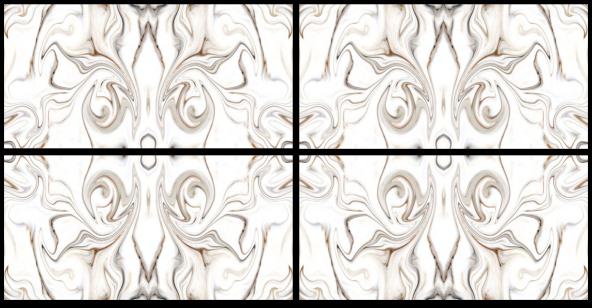

#### **SPARKLE NATURAL**



600X1200 MM






## TORONTO BEIGE



**TORONTO BEIGE** 

600X1200 MM



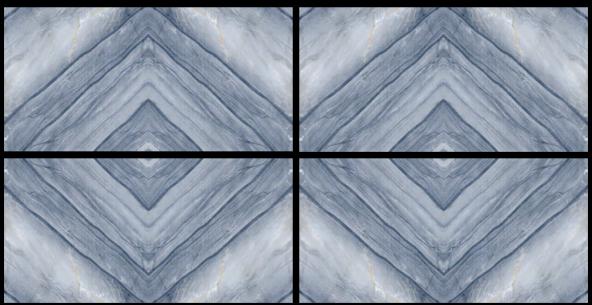

## TROPICAL BLUE



TROPICAL BLUE

600X1200 MM

#### **TECHNICAL SPECIFICATION**

TEST DISCRIPTION	STANDARD AS PER IOS-13006/EN177 GROUP BIB	MEAN VALUE	
Deviation in length & width	±0.6 %	±0.3 %	
Deviation in thickness	±5.0 %	±4.0 %	
Straightness in side	±0.5 %	±0.1 %	
Rectangularity	±0.5 %	±0.1 %	
Surface flatness	±0.5 %	±0.2 %	
Color difference	Unaltered	No change	
Glossiness	As per mfg.	10-40 (As per surface)	
Water absorption	≤ 0.05%	≤ 0.05%	
Modulus of rupture	Min. 35 N/mm²	Min. 35 N/mm²	
Impact resistance	As per mfg.	Min. 0.55 Porcelain	
Surface abrasion resistance	As per mfg.	PEI II-V	
MOH's hardness	As per mfg.	Min. 7	
Frost resistance	No damage	No damage	
Thermal shock resistance	No damage	No damage	
Moisture expansion	Nil	Nil	
Chemical resistance	No damage	No damage	
Stain resistance	Resistant	Resistant	
Crazing resistance	As per mfg.	2 Cycle	

#### **PACKING DETAIL**

Size	Thickness (approx.)	Pieces / Box	Area / Box	Wt./Box (approx.)
600x1200mm	9 mm	2 pcs.	1.44 sq. mtr.	28 kgs.